

# DATA SHEET

**DP-43016-4**

**xtremeHB™ H-Bridge Module**

**J1939 Slave Node**

**Four Connectors with Two 25 Amp Pins**

This product is a DC Load reversing circuit that acts as a CAN slave node. With its fully solid-state design, it is ideal for off-road conditions including construction, road maintenance, and marine environments.



## Connector Pinout

Connector	Function	Description	Rating
CAN1-1	Node Power	Battery (8. ... 32V DC)	
CAN1-2	CAN 1 High	CAN+	
CAN1-3	GND	CAN GND	
CAN1-4	CAN 1 Low	CAN-	
CAN1-1	Node Power	Battery (8. ... 32V DC)	
CAN2-2	CAN 2 High	CAN+	
CAN2-3	GND	CAN GND	
CAN2-4	CAN 2 Low	CAN-	
J1-1	Dig Output H1-B	H-Bridge	25 A
J1-2	Dig Output H1-A	H-Bridge	25 A

J2-1	Dig Output H2-B	H-Bridge	25 A
J2-2	Dig Output H2-A	H-Bridge	25 A

J3-1	Dig Output H3-B	H-Bridge	25 A
J3-2	Dig Output H3-A	H-Bridge	25 A

J4-1	Dig Output H4-B	H-Bridge	25 A
J4-2	Dig Output H4-A	H-Bridge	25 A

POWER	Output Power	Power Lug	100 A
GROUND	Battery Return	Ground Lug	100 A

## Mechanical Data

Housing	Molded glass filled nylon
Dimensions (l x w x h)	8.25 x 3.929 x 1.625 (209.6 x 99.8 x 41.3 mm)
Weight	1.74 lb. (789 g)
Graphic	Black polyester matte
Torque Specification	Power Stud (3/8-16): dry torque 154 in-lbs. Ground Stud (5/16-18): dry torque 86 in-lbs.



## Technical Data

Connections: Connectors	MFG (DP): 4 pin DEUTSCH DT06-4S or equivalent x 2 2 pin DEUTSCH DTP10-2P (134-5315-00504) x 4
Mating Connectors	4 pin DEUTSCH DT06-4SA (134-1000-00604) 2 pin DEUTSCH DTP06-2S (134-5002-F0502) x 4
Power Feed	3/8-16 stud
Ground Feed	5/16-18 stud
Operating Voltage	8.0 - 32.0 V DC
Switching Current	4 H-Bridge A/B pairs at 25 Amps each
Total Module Current	100 A
Operating Temperature	-40...85 °C
Storage Temperature	-40...85 °C
Ingress Protection	IP67

LEDs	Color	Status
STAT	RGB	Power to module
COM	RGB	Communication status
H-Bridge I/O	RGB	Output status

				12 Month Warranty	Page	1 of 3
					Date	Name
				<b>A Murrelektronik Company</b>	Originator	06.27.24 AH
Rev	Description	Date	Name		Approved	06.30.24 TO
a	DCN G162 - Initial release	08.30.24	AH	DP-43016-4_db_e_a.docx	The trademark DEUTSCH is owned by the TE Connectivity Ltd. family of companies.	

# DATA SHEET

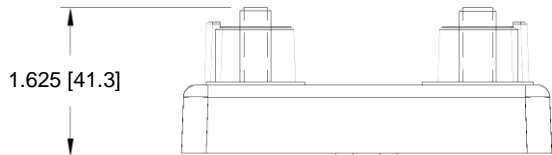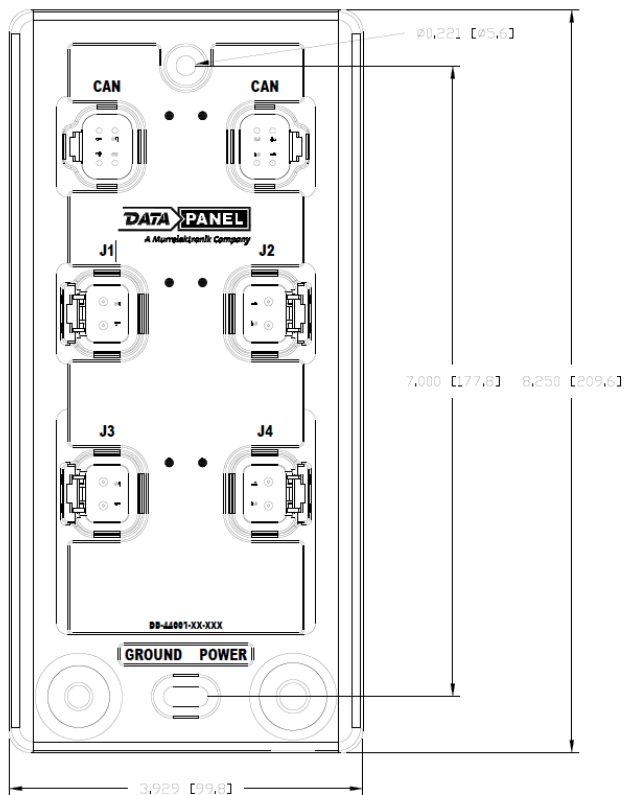

## H-Bridge CAN Control and Operation Message Summary

Description	Function	PGN
H-Bridge Control 1	Output Control	0x9D(SA*)
CTRL1 COMMAND	Module Configuration	0xEF(SA)

\*SA: Module Source Address

## Diagnostics and Status Message Summary

Description	Function	PGN
Status 1	Module Status	0xFF22
Status 2	Module Status	0xFF23
Temperature	Temperature Status	0xFF25
Device Status	Module Status	0xFF53
CTRL1 STAT	Configuration Data	0xEF(CSA*)

\*CSA: Controller Source Address

## P/N Matrix


Part No.	Description
DP-43016-4	H-Bridge Module 4 pairs

## Mounting Guide

Hole Diameter	0.221"
Suggested Bolt	M5 x 1.125"
Torque	1.8...2.2 Nm / 15.9...19.5 lbf in



The fastening screws depend on the surface of the installation site. Use the screws according to the structure of the surface.

				12 Month Warranty		Page	2 of 3
				 <b>A Murrelektronik Company</b>		Date	Name
Rev	Description	Date	Name		Originator	06.27.24	AH
a	DCN G162 - Initial release	08.30.24	AH	Approved	06.30.24	TO	
				DP-43016-4_db_e_a.docx	<small>The trademark DEUTSCH is owned by the TE Connectivity Ltd. family of companies.</small>		

## TEST SPECIFICATIONS

### Mechanical Tests

ISO 16750-3, Test VII*	Commercial vehicle – sprung masses, random vibration Mounting location: vehicle body IEC 60068-2-64
ISO 16750-3, 4.2.2.2*	Mechanical shock – 50g, 6ms, 10 shocks per direction Mounting location: vehicle body IEC 60068-2-27

### Environmental Tests

ISO 16750-4, 5.3.2	Rapid change of temperature – -40°C to 95°C, 100 cycles IEC 60068-2-14, Test Na
ISO 16750-4, 5.6.6.2	Cyclic Humidity – 55°C, 6 cycles, IEC 60068-2-30, Test Db
ISO 16750-4, 5.7.2	Steady State Humidity – 40°C, 93% RH, 21 days IEC 60068-2-78, Test Cab


### Chemical Tests

ISO 16750-5:2023*	Chemical resistance – AA (diesel fuel), BA (engine oil), BB (differential oil), BC (transmission fluid), BD (hydraulic fluid), BE (greases), CC (antifreeze fluid), DB (vehicle washing chemicals), DE (wheel cleaner)
-------------------	--

### Electrical Tests

ISO 13766-1:2018	Radiated Immunity
ISO 13766-1:2018	Radiated Emissions
ISO 16750-2:2023*	Electrical tests
ISO 13766-1:2018 ISO 13766-2:2018	Conducted Transients
ISO 13766-1:2018 ISO 13766-2:2018	ESD

\* Pending Final Testing

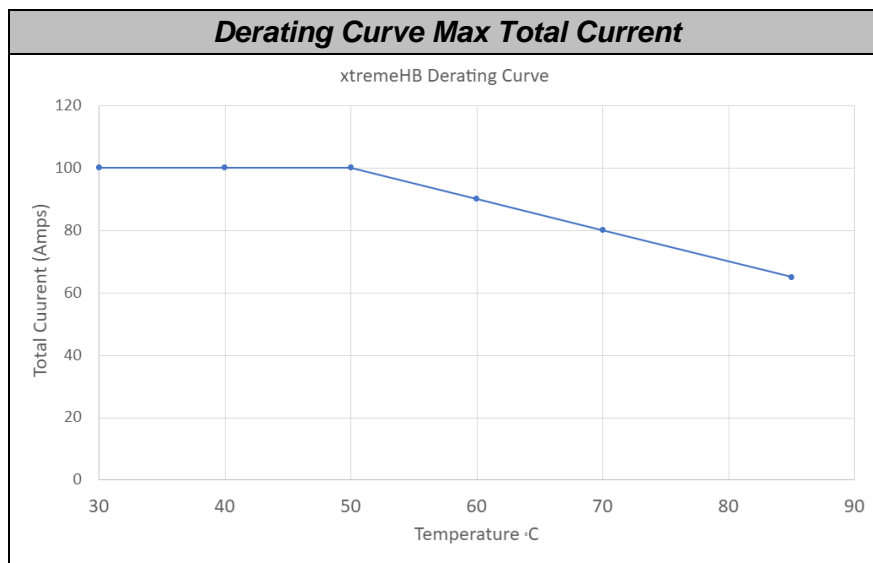

				12 Month Warranty	Page	3 of 3
				<b>DATA PANEL</b> A Murrelektronik Company	Date	Name
					Originator	06.27.24
Rev	Description	Date	Name	Approved	06.30.24	TO
a	DCN G162 - Initial release	08.30.24	AH	DP-43016-4_db_e_a.docx	The trademark DEUTSCH is owned by the TE Connectivity Ltd. family of companies.	